


PCOM-B639VG

Intel® Core™ Kabylake-H/Skylake-H Processor based on Type VI COM Express module with DDR4 SDRAM, VGA, LVDS, Gigabit Ethernet, SATA 3.0 and USB

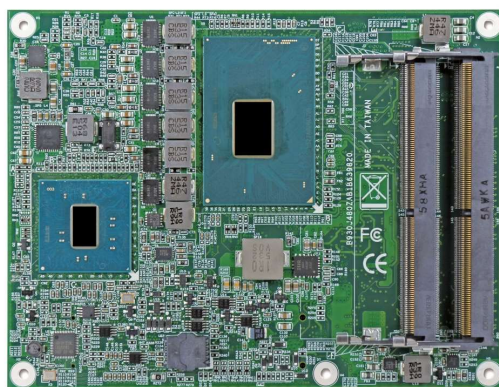

PCOM-B639VG brings three important factors, DDR 4 memory support, Gen 3 PCIe support, and 30% faster graphic performance. The DDR4 is trend and it supports both ECC and Non-ECC with the same pin definition. In other words, customer can use both ECC and Non-ECC memories depending their application and demand. In order to achieve that, all the PCH SKUs are considered in development stage to make sure that customer has various models to meet different requirements in cost, performance, and memory type. The Gen 3 PCIe support provides faster PCIe speed so that the performance of PCIe expansion card will be better. It is crucial for Networking and Medical related applications. The enhanced graphic performance brings 4K support.

FEATURES

- Kabylake-H / Skylake-H is the 7th / 6th Generation Intel® Core™ Processor with 14nm and brand new architecture provide more performance
- Seek mobile solution but with high performance and medium TDP
- Support faster I/O interfaces on eight PCI Express Gen3 lanes (four x 1 can be configured to on x4 lane)

ORDERING GUIDE

AB1-3E35	PCOM-B639VG-G3902E.TYPE VI.Skylake-H.Basic Form Factor.Com Express Module.ECC/Non-ECC.DDR4
AB1-3E25	PCOM-B639VG-G3900E.TYPE VI.Skylake-H.Basic Form Factor.Com Express Module.ECC/Non-ECC.DDR4
AB1-3E26	PCOM-B639VG-6102E.TYPE VI.Skylake-H.Basic Form Factor.Com Express Module.ECC/Non-ECC.DDR4
AB1-3E27	PCOM-B639VG-6100E.TYPE VI.Skylake-H.Basic Form Factor.Com Express Module.ECC/Non-ECC.DDR4
AB1-3G44	PCOM-B639VG-7102E. TYPE VI. Kabylake-H. Basic Form Factor. Com Express Module. ECC/Non-ECC. DDR4
AB1-3G45	PCOM-B639VG-7100E. TYPE VI. Kabylake-H.Basic Form Factor. Com Express Module. ECC/Non-ECC. DDR4

GENERAL

Form Factor (mm)	Basic (125 x 95mm)
Type	Type 6
CPU/Clock/Cache	Intel® Kabylake-H/Skylake-H Core™ i7-7820EQ/ i5-7442EQ/ i5-7440EQ/ i3-7102E/ i3-7100E/ i7-6820EQ/ i7-6822EQ/ i5-6440EQ/ i5-6420EQ/ i3-6100E/ i3-6102E/ G3900E/ G3902E Up to 4 Cores Smart Cache 2MB to 8MB
Chipset	QM175/ CM238/ QM170/ HM170/ CM236
Memory	DDR4-2133MT/s Non-ECC/ ECC 2 Memory Channel
USB	4 x USB 3.0 8 x USB 2.0
PCI Express	1 x PCIe x16 8 x PCIe x1
Ethernet	Intel® I219LM

I/O INTERFACE

Audio	Intel® High definition Audio
Graphic Controller	Intel® HD Graphics 530
Carrier Board	PCOM-C605 (Type 6)
Extend Temperature Support	Support 0~60°C

