


WADE-8016

Intel® 4th Gen Core™ i5/i7 processor based Mini-ITX Board with dual Gigabit Ethernet, 2x SATA III ports, 4x COM ports, 1x PCIe x16 expansion slot and 1x CFEX

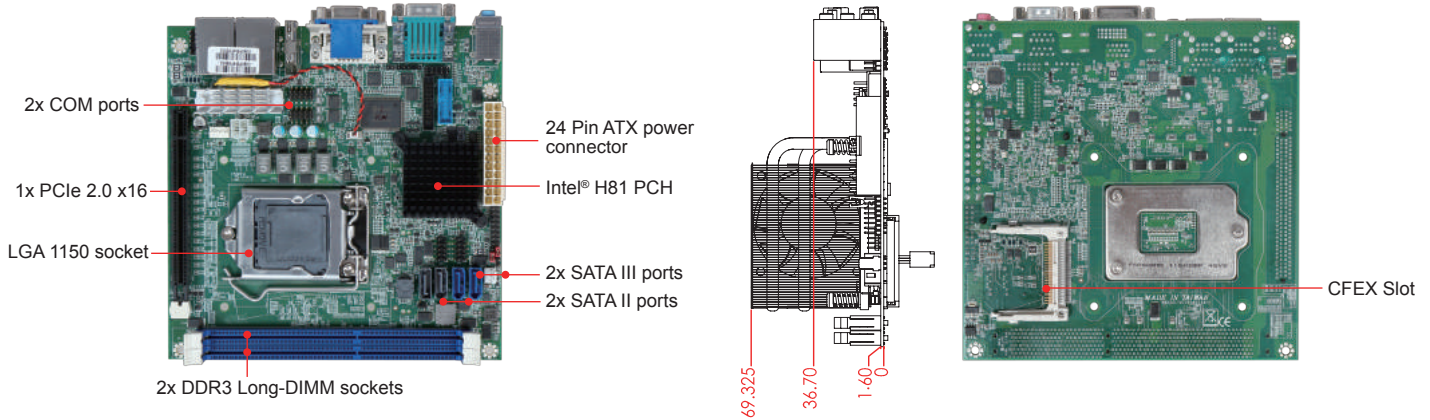


WADE-8016 is based on Intel® H81 chipset and desktop processor sku like Core™ i7 and i5. WADE-8016 of the Intel® platform will provide high performance and flexibility for functional expansion, such as Gaming, Kiosk, DS, Medical, Defense, Industrial automation and control applications.

FEATURES

- Intel® i5/i7 4th Dual/Quad processor in LGA 1150
- Intel® H81 PCH
- 2x DDR3 Long-DIMM slots up to 16GB (support 1333/1600 MT/s)
- 1x PCIe x16 slot (Gen3 support)
- 2x SATA III Ports and 2x SATA II ports(1x SATA II switch CFEX)
- 1x CFEX
- 4x COM ports (2pcs on rear I/O, 2pcs on board header)
- Total 10x USB ports (2x USB 3.0 Ports & 8x USB 2.0 Ports)

REAR I/O

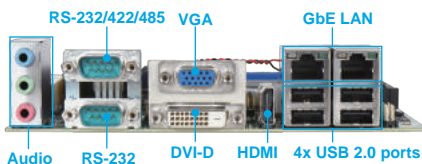

ORDERING GUIDE

AB1-3B38	(R)WADE-8016 Mini-ITX ESB.H81 w/o LGA1150.w/DDR3 SDRAM/VGA/DVI/HDMI/Dual GbE/COM/Audio/ USB
-----------------	--

PACKING LIST

One WADE-8016 motherboard
One Driver CD
One SATA III cable

GENERAL

Processor	- Intel® 4th Gen Core™ i5/i7 processor in LGA-1150 package - Cache up to 6MB (for Quad Core) - support Intel® Turbo Boost Technology , Virtualization Technology (VT-x) ,Hyper-Threading Technology
Chipset	Intel® H81 PCH
BIOS	AMI BIOS
Memory	Support up to 16GB DDR3 1333/1600 MT/s SDRAM on 2x 240pin DIMM sockets
Storage Devices	- 2x SATA II - 2x SATA III - 1x CFEX
Watchdog Timer	Programmable watchdog timer, time out period from 0.5 sec to 255 sec.
Expansion Interface	1x PCIe 2.0 x16 slot

I/O INTERFACE

Super I/O	WINBOND W83627UHG
Audio	- Intel® H81 PCH built in HDA controller - Realtek ALC892 supports 5.1 channels
Ethernet	2x onboard RealTek RTL8111G-CG
Serial Port	- 1x RS-232 port on rear I/O - 1x RS-232/422/485 selectable port on rear I/O - 2x RS-232 on pin header
USB	- 2x USB 3.0 Ports on board - 4x USB 2.0 Ports on rear I/O - 4x USB 2.0 Ports on board
Keyboard & Mouse	PS/2 on board dedicated to Keyboard & Mouse
GPIO	On board programmable 8-bit Digital I/O

DISPLAY

Graphic Controller	Intel® HD Graphics 4600 supports DirectX*11, OpenCL® 1.2, OpenGL® 3.2 Video decode hardware acceleration supports for H.264, MPEG2, MVC, VC-1, WMV9 and VP8 formats
Display Interface	- VGA: up to 1920x1200 - DVI: up to 1920x1200 - HDMI: up to 4096x2304

Mechanical & Environment

Dimension	170mm(L) x 170mm(W); 6.69"(L) x 6.69"(W)
Power Supply	ATX 24-pin power input
Environment	- Operation Temperature: 0°C~60°C - Storage Temperature: -20°C~80°C - Relative Humidity: 5%~90%, non-condensing : 5%~95%, non-condensing
Certification	CE,FCC Class A
MTBF	Over 120,000 hours at 40°C

