


WADE-8077

Intel® Cedar Trail Atom™ processor based Mini-ITX Board with dual display, dual Gigabit Ethernet, 2x SATA Ports, 2x COM Ports (optional up to 2x COM ports) and 6x USB Ports

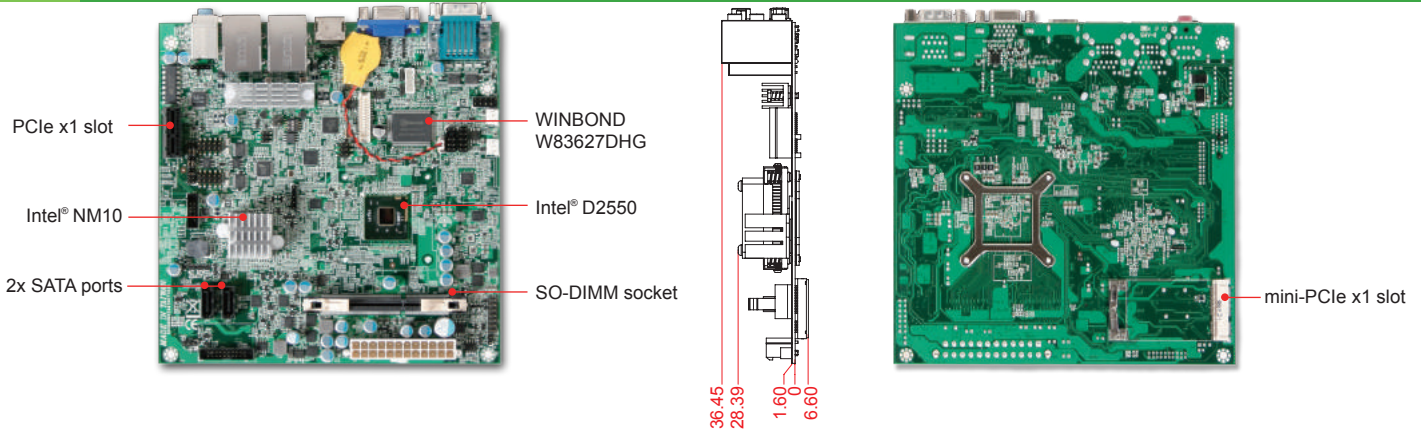


WADE-8077 is designed to provide high performance and flexibility for functional expansion and is ideal for applications in Gaming, Kiosk, Digital Signage, and Industrial Automation and control.

FEATURES

- Intel® Atom™ D2550 processor
- Intel® NM10 Chipset
- 1x 204-pin SO-DIMM supports single channel DDR3 SDRAM up to 4GB
- Dual display: VGA /LVDS (24-bit dual channel)/HDMI
- 1x mini-PCIe and 1x PCI Express x1 expansion slot
- 2x SATA II ports
- 2x COM ports (optional up to 4x COM ports)
- 2.6W AMP function (optional)

REAR I/O

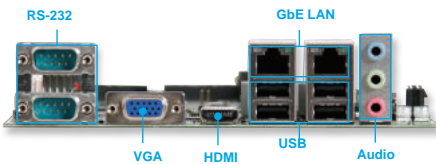

ORDERING GUIDE

AB1-3799	(R).WADE-8077 Mini-ITX ESB.Intel® Cedar Trail 1.86G D2550 on Board+NM10.w/DDR3 SO-DIMM/VGA/HDMI/24bits LVDS/Dual GbE/COM/Audio/USB
AB1-3880	(R).WADE-8077-WS Mini-ITX ESB.Intel® Cedar Trail 1.86G D2550 on Board+NM10.w/o heat-sink. w/DDR3 SO-DIMM/VGA/HDMI/24bits LVDS/Dual GbE/COM/Audio/USB
AB1-3861	(R).WADE-8077-A2C Mini-ITX ESB.Intel® Cedar Trail 1.86G D2550 on Board+NM10. w/2.6W AMP. w/DDR3 SO-DIMM/VGA/HDMI/24bits LVDS/Dual GbE/COM/Audio/USB

PACKING LIST

One WADE-8077 Mini-ITX Main Board
One Installation CD
One SATA Cable
One I/O shield

GENERAL

Processor	Intel® Atom™ D2550 (1.86GHz, 10W) processor in FCBGA559 package
Chipset	Intel® NM10 Express chipset
BIOS	Phoenix BIOS (SPI ROM)
Memory	Supports single channel up to 4GB DDR3 800/1066 MT/s SDRAM on 1x 204-pin SO-DIMM socket
Storage Devices	2x SATA II
Watchdog Timer	Programmable via S/W from 1 sec. to 255 sec.
Hardware Monitoring	- FAN Speed (CPU & System), Temperature (CPU & System), Voltage - Beep alarms for field fan out, over/under voltage of DC
Expansion Interface	- 1x PCIe 1.0 x1 slot - 1x mini-PCIe slot (Gen 1, 2.5 GT/s)

I/O INTERFACE

Super I/O	WINBOND W83627DHG
Audio	- Intel® NM10 built-in High Definition Audio up to 96-kHz 24-bit - Realtek ALC662, 5.1 channels - Audio Jack DIP Light Pink/Lime/Light Blue
Ethernet	RTL8111F Dual Gigabit Ethernet
Serial Port	- 2x RS-232 on rear I/O - 1x RS-232 with header (optional) - 1x RS-232/422/485 selectable with header (optional)
USB	- 4x USB 2.0 ports on rear I/O - 2x USB 2.0 ports on board with header
Keyboard & Mouse	1x PS/2 Keyboard & Mouse on board
GPIO	On board programmable 8-bit Digital I/Os

DISPLAY

Graphic Controller	- Intel® Graphics Technology provides a visually stunning experience optimized for Blu-ray and HD video with Windows Vista support - Supports DirectX 9 compliant Pixel Shader v3.0 and OpenGL® 3.0
Display Interface	- VGA: up to 1920x1200 on rear I/O - HDMI: up to 1920x1200 on rear I/O - LVDS: Digital 24-bits LVDS up to 1920x1200 on board

Mechanical & Environment

Dimension	170mm(L) x 170mm(W); 6.69"(L) x 6.69"(W)
Power Supply	ATX 24-pin power input
Environment	- Operation Temperature: 0°C~60°C - Storage temperature: -20°C~80°C - Relative Humidity: 5%~95%, non-condensing
Certification	CE, FCC Class A
MTBF	Over 140,000 hours at 40°C

