


# ORION-300DX/24

300W 24V DC input DC/DC  
PS/2 ATX power supply

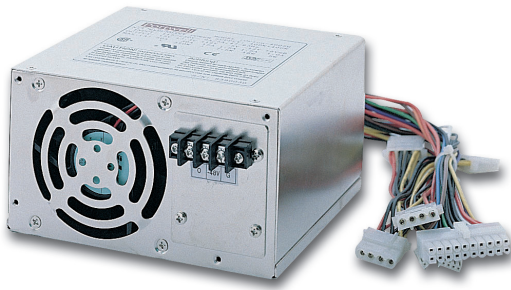

## SPECIFICATION

Input Voltage	19V~32V DC for ORION-300DX/24
Input Current	10A@-48V, 20A@24V DC input
Efficiency	> 65%
Holdup Time	16 ms
Over Voltage Protection	+5V: 5.7 ~ 7.0V
MTBF	100,000 hrs
EMI & Safety Approval	UL, TUV, CSA
Temperature/Humidity	Operating: 0°C ~ 40°C, 10% ~ 90%RH Storage: -60°C ~ 70°C, 5% ~ 95%RH
Dimension (WxDxH)	150 x 140 x 86 mm; 5.9" x 5.5" x 3.4"

## FEATURES

- PS/2 ATX power supply suitable for 2U and larger chassis
- ORION-300DX/24 for +24V DC input, suitable for vehicle applications
- Max. -12V output is 2A, suitable for CTI application

## DC OUTPUT


	+5V	+3.3V	+12V	-5V	-12V	+5Vsb
Max. Load	30A	15A	15A	2A	2A	1.2A
Min. Load	2A	0.3A	0.5A	0A	0A	0A
Load Reg.	±5%	±3%	±5%	±10%	±5%	±5%
Cross Reg.	±5%	±3%	±5%	±10%	±5%	±5%
Line Reg.	±1%	±1%	±1%	±1%	±1%	±1%
Ripple	±1%	±1.5%	±1%	±2%	±1%	±1%
Noise	±1%	±1.5%	±1%	±2%	±1%	±1%

## ORDERING GUIDE

- **ORION-300DX/24**  
300W 24V DC input DC/DC PS/2 ATX power supply

# ORION-300DX/48

300W -48V DC input DC/DC  
PS/2 ATX power supply

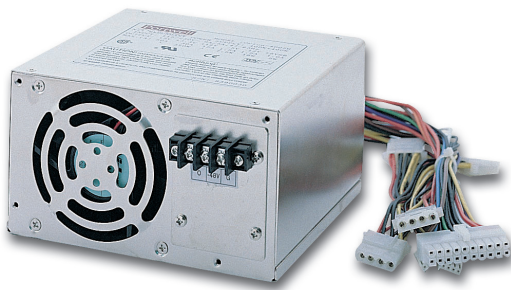

## SPECIFICATION

Input Voltage	-40V~-72V DC for ORION-300DX/48
Input Current	10A@-48V, 20A@24V DC input
Efficiency	> 65%
Holdup Time	16 ms
Over Voltage Protection	+5V: 5.7 ~ 7.0V
MTBF	100,000 hrs
EMI & Safety Approval	UL, TUV, CSA
Temperature/Humidity	Operating: 0°C ~ 40°C, 10% ~ 90%RH Storage: -60°C ~ 70°C, 5% ~ 95%RH
Dimension (WxDxH)	150 x 140 x 86 mm; 5.9" x 5.5" x 3.4"

## FEATURES

- PS/2 ATX power supply suitable for 2U and larger chassis
- ORION-300DX/48 for -48V DC input, suitable for telecommunication applications
- Max. -12V output is 2A, suitable for CTI application

## DC OUTPUT

	+5V	+3.3V	+12V	-5V	-12V	+5Vsb
Max. Load	30A	15A	15A	2A	2A	1.2A
Min. Load	2A	0.3A	0.5A	0A	0A	0A
Load Reg.	±5%	±3%	±5%	±10%	±5%	±5%
Cross Reg.	±5%	±3%	±5%	±10%	±5%	±5%
Line Reg.	±1%	±1%	±1%	±1%	±1%	±1%
Ripple	±1%	±1.5%	±1%	±2%	±1%	±1%
Noise	±1%	±1.5%	±1%	±2%	±1%	±1%

## ORDERING GUIDE

- **ORION-300DX/48**  
300W -48V DC input DC/DC PS/2 ATX power supply