



RUBY-9717VGAR

Intel® Core™ 2 Quad processor based Micro-ATX Industrial Mainboard with onboard DVI/VGA Dual-display, DDR2 SDRAM, Gigabit Ethernet, Audio and USB

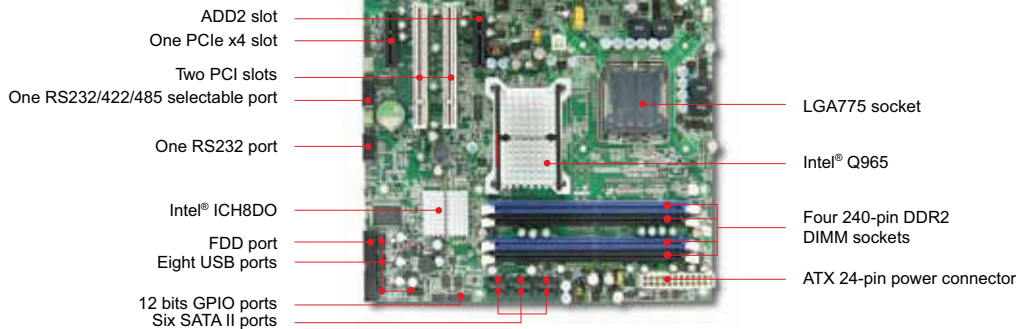


Supported by the Intel® Q965, the RUBY-9717VGAR is based on industrial uATX motherboard provides multiple I/O connectors and applies high performance in the Medical ultrasound equipment, Data Communications, Multimedia, POS and Gaming markets.

FEATURES

- Industrial mainboard with a µATX form factor that supports all Intel® mainstream desk top processors - Core™ 2 Quad, Core™ 2 Duo, Pentium® D, Pentium® 4, Celeron® D processor in LGA775 package
- Onboard dual independent display: VGA and DVI-D
- One ADD2 graphics slot for ADD2 card
- One PCI Express x4 slot and two 32-bit PCI expansion slots
- Six 32-bit PCI expansion slots for most industrial I/O cards
- Six SATA II ports support Intel® Matrix Storage Technology with RAID 0,1,5,10

REAR I/O



ORDERING GUIDE

AB1-3055	RUBY-9717VGAR.Micro-ATX.LGA775. Single P4.w/VGA/GbE/Audio/RAID
----------	---

PACKING LIST

One RUBY-9717VGAR Micro-ATX Industrial Main Board
One SATA II Cable
One Installation CD
One I/O shield



GENERAL

Processor	- Intel® Core™ 2 Quad/Core™ 2 Duo Pentium® D/Pentium® 4/Celeron® D Processor with 2MB L2 Cache in LGA775 package - FSB: 1066/800MHz - Supports Enhanced Intel SpeedStep® Technology, Intel® 64 architecture, Execute Disable Bit (Core™ 2 Duo only)
Chipset	Intel® Q965 Graphics and Memory Controller Hub (28W)+ICH8DO
BIOS	Award BIOS
Memory	Supports up to 8GB DDR2 533/667/800MHz SDRAM on four 240-pin DIMM sockets
Storage Devices	- 6x SATA support 3Gb/s data transfer rate - RAID 0,1,5,10 (supported by Intel® Matrix Storage Technology) - 1x FDD channel
Watchdog Timer	Programmable via S/W from 1 sec. to 255 min.
Hardware Monitoring	- System monitor (fan, temperature, voltage) - Temperature (CPU & System) - Voltage (CPU Vcore, 5VSB, 12V, 5V, 3.3V)
Expansion Interface	- 1x ADD2 slot(single SDVO bus) - 1x PCI Express x4 slot (Gen1, 2.5 GT/s) - 2x PCI 32-bit slots

I/O INTERFACE

Super I/O	Winbond W83627HG-AW
Audio	- Intel® Q965 built-in High Definition Audio up to 192-kHz 32-bit - Realtek ALC262-VC2 LQFP48 codec, 2+2 channels - Audio Jack DIP Light Pink/Lime/Light Blue
Ethernet	- Intel® 82566DM single gigabit ethernet controller - 1x RJ-45 connectors with two LED indicators at rear I/O panel - PCI Express x1 interface based Gigabit Ethernet
Serial Port	- 2x RS232 Power selectable on rear I/O - 1x RS232/422/485 selectable on board and 1x RS232 on board
USB	- 2x USB 2.0 ports on rear I/O and 8x USB 2.0 ports on board - 480 Mb/s bus comprehends the high-speed/full-speed/low-speed data ranges
Keyboard & Mouse	1x PS/2 Keyboard & Mouse on rear I/O
GPIO	On board programmable 12-bit Digital I/Os
Other	1x parallel port on rear I/O

DISPLAY

Graphic Controller	- Intel® Q965 Graphics and Memory Controller Hub integrated Intel® Graphics Media Accelerator 3000 (Intel® GMA 3000), providing a visually stunning experience optimized for Blu-ray and HD video - ADD2 graphic slot for ADD2 card
Display Interface	- VGA: Resolution up to 2048x1536 @75Hz - DVI-D: up to 1600x1200 @60Hz

Mechanical & Environment

Dimension	243.8(L) x 243.8(W)mm; 9.6"(L) x 9.6"(W)
Power Supply	- Typical: +12V(CPU)@3.31A; +12V(System)@5.82A; +5V@5.95A - Supports ATX mode
Environment	- Operation Temperature: 0°C to 55°C - Storage Temperature: -20°C to 80°C - Relative Humidity: 5% to 90%, non-condensing
MTBF	Over 100,000 hours at 40°C